


WPK SERIES

Blue solid elastomer tyre on aluminium core rim.


Hardness: 70 ± 2 Shore D
Temperature range: -20°C to +80°C

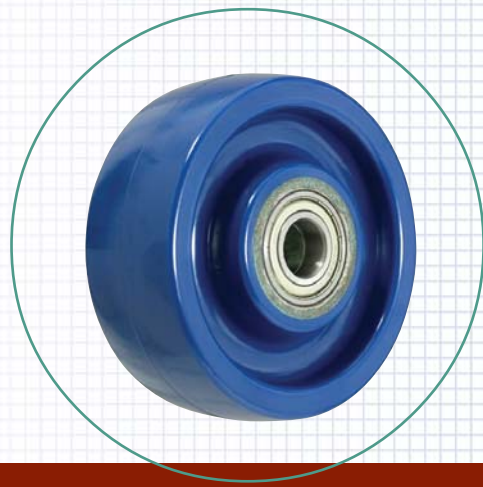

500-700kg

Wheel diameter (mm)	Tread width (mm)	Bore size (mm)	Hub length (mm)	Ball journal bearing
125	50	20	56	BZH125WPKBJM20 500kg
150	50	20	56	BZH150WPKBJM20 550kg
200	50	20	56	BZH200WPKBJM20 700kg

Wheel diameter (mm)	Tread width (mm)	Bore size (mm)	Hub length (mm)	Ball journal bearing
125	50	20	56	BZH125WPKBJM20 500kg
150	50	20	56	BZH150WPKBJM20 550kg
200	50	20	56	BZH200WPKBJM20 700kg

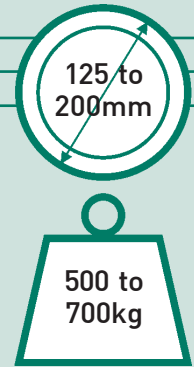

ELASTOMER WHEELS

'Real solid' elastomer wheels are made from premium liquid-cast urethane mechanically locked and chemically bonded to a metallic hub holding the bearings. Designed to resist compression set, these wheels have excellent resilience for easy movement and expulsion of floor debris. Can be used in rust-forming environments with a suitable hub and bearings.

WPK SERIES ELASTOMER/ALUMINIUM



Kingsley Close, Lee Mill Industrial Estate
Ivybridge, Devon. PL21 9LL United Kingdom
International;
+44 1752 690622 Telephone
+44 1752 698696 Fax
0845 124 9955 Local Rate Telephone
0845 125 9955 Local Rate Fax