


W 161 spring-loaded trolley



No more bending: easy access to the contents of the trolley for ergonomic working, for example in libraries, laundries or in the catering trade.

- Sturdy, generously dimensioned edge and base profile sections, high-strength positive locking ensures permanent bonding to jacket metal.
- Edge profile section reinforced with abrasion-resistant plastic padding.
- Trolley with vertically moveable base which keeps the load at constant height for easy access (Fig. 1).
- Depending on the type of trolley, the load capability can be varied from 30 to 195 kg in increments of 15 kg by means of replaceable lifting elements.
- The moveable base does not tilt, even when loaded on only one side (Fig. 2).
- Running gear: 2 swivel and 2 fixed castors, Ø 125 mm, 40 mm wide, easy running, rubber wheels, "non-marking," roller bearings, thread guards. Castors arranged centrally for easy manoeuvring even in the most confined spaces.
- Corner-mounted running gear available on request.

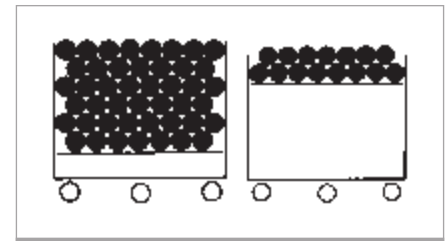

Constant working height (Fig. 1)



Replaceable lifting elements (Fig. 2)

Inside dimensions L × W × H, approx. mm	Outside dimensions L × W × H, approx. mm	Volume, approx. l	Weight, approx. kg	Set for loading kg	Order No.
1000 × 650 × 485	1060 × 710 × 820	315	24.5	90.0	40644
1010 × 420 × 460	1060 × 470 × 800	195	21.0	30.0	40645*
1010 × 600 × 460	1060 × 650 × 800	280	25.0	45.0	40646
1410 × 700 × 580	1460 × 750 × 920	570	31.5	150.0	40756

* Running gear: 4 corner-mounted swivel castors



For more information on product features and quality, see the Service section starting on page 336.

Variant: spring-loaded trolley with step stool

The combination of a spring-loaded trolley with a step stool is particularly suitable for use in storage and retrieval areas in industry.

Project-specific fabrication to meet your individual requirements.



Storage and retrieval trolley, project-specific